HARRY J. KROKUS, JR.

INSTRUCTIONS

GEH-1539F
*Supersedes GEH-1539E*

# TYPES AB AND DB
## AMMETERS AND VOLTMETERS




MP MASTER
MA32588

GENERAL ELECTRIC




*PRESENT ONLY ON A-C VOLTMETERS (EXCEPT EXPANDED SCALE) RATED 150 VOLTS OR BELOW

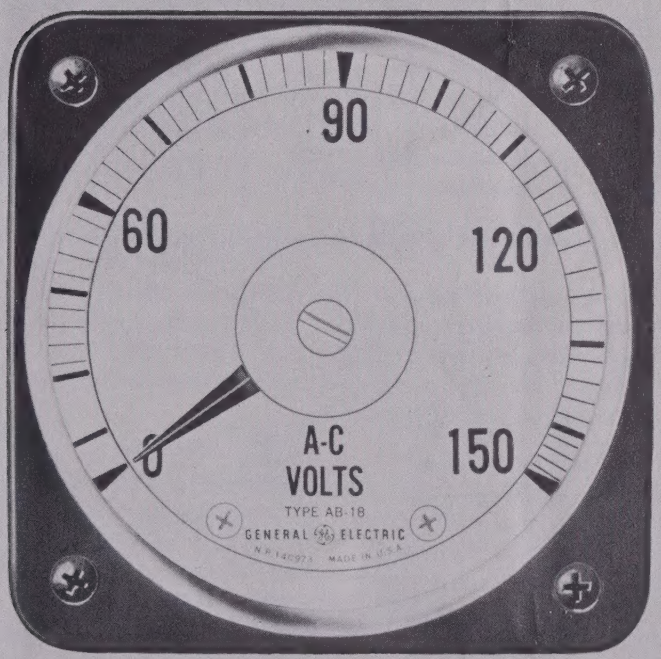NOTE: THE LETTERS NEXT TO THE TERMINAL STUDS ARE FOR PURPOSES OF DIMENSIONAL LOCATION ONLY. FOR CONNECTIONS, SEE THE APPROPRIATE EXTERNAL CONNECTION DIAGRAM

| INSTRUMENT | STUD LOCATION | DIMENSIONS (MODEL NO. ENDING IN "1") | | DIMENSIONS (MODEL NO. ENDING IN "2") | |
|---|---|---|---|---|---|
| | | X | Y | X | Y |
| D-c Ammeters | C,D | 3-9/16" | 2-31/32" | 4-15/32" | 3-7/8" |
| D-c Voltmeters | A,B | 3-9/16" | 2-31/32" | 4-15/32" | 3-7/8" |
| D-c Ground Detector | C,D | 3-9/16" | 2-31/32" | 4-15/32" | 3-7/8" |
| A-c Ammeters | A,B | 4-15/32" | 3-7/8" | 4-15/32" | 3-7/8" |
| A-c Voltmeters | A,B | 4-15/32" | 3-7/8" | 4-15/32" | 3-7/8" |
| A-c Voltmeters (expanded-scale) | A,B | 5-29/32" | 5-5/16" | 5-29/32" | 5-5/16" |

*Fig. 1. Dimensions of Type AB-14, and Type DB-14, ammeters, and voltmeters, and ground detectors.*

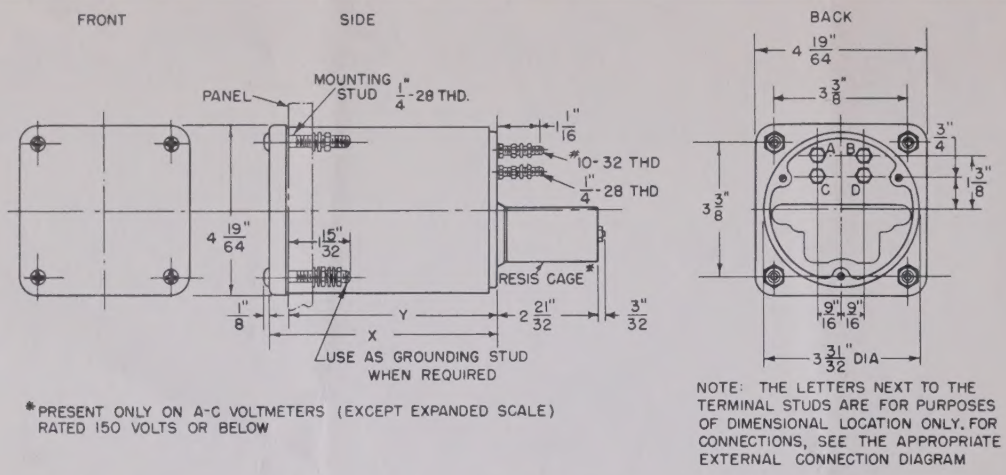


*PRESENT ONLY ON A-C VOLTMETERS (EXCEPT EXPANDED SCALE) RATED 150 VOLTS OR BELOW

NOTE: THE LETTERS NEXT TO THE TERMINAL STUDS ARE FOR PURPOSES OF DIMENSIONAL LOCATION ONLY. FOR CONNECTIONS, SEE THE APPROPRIATE EXTERNAL CONNECTION DIAGRAM.

| INSTRUMENT | STUD LOCATION | DIMENSIONS (MODEL NO. ENDING IN "1") | | DIMENSIONS (MODEL NO. ENDING IN "2") | |
|---|---|---|---|---|---|
| | | X | Y | X | Y |
| D-c Ammeter | C,D | 3-5/16" | 2-27/32" | 4-7/32" | 3-3/4" |
| D-c Voltmeter | A,B | 3-5/16" | 2-27/32" | 4-7/32" | 3-3/4" |
| D-c Ground Detector | C,D | 3-5/16" | 2-27/32" | 4-7/32" | 3-3/4" |
| A-c Ammeter | A,B | 4-7/32" | 3-3/4" | 4-7/32" | 3-3/4" |
| A-c Ammeter (double-rated) | A,B,E,F | 4-7/32" | 3-3/4" | 4-7/32" | 3-3/4" |
| A-c Voltmeter | A,B | 4-7/32" | 3-3/4" | 4-7/32" | 3-3/4" |
| A-c Voltmeter (expanded-scale) | A,B | 5-21/32" | 5-3/16" | 5-21/32" | 5-3/16" |

*Fig. 2. Dimensions of Types AB-16 and DB-16 ammeters, voltmeters, and ground detectors*
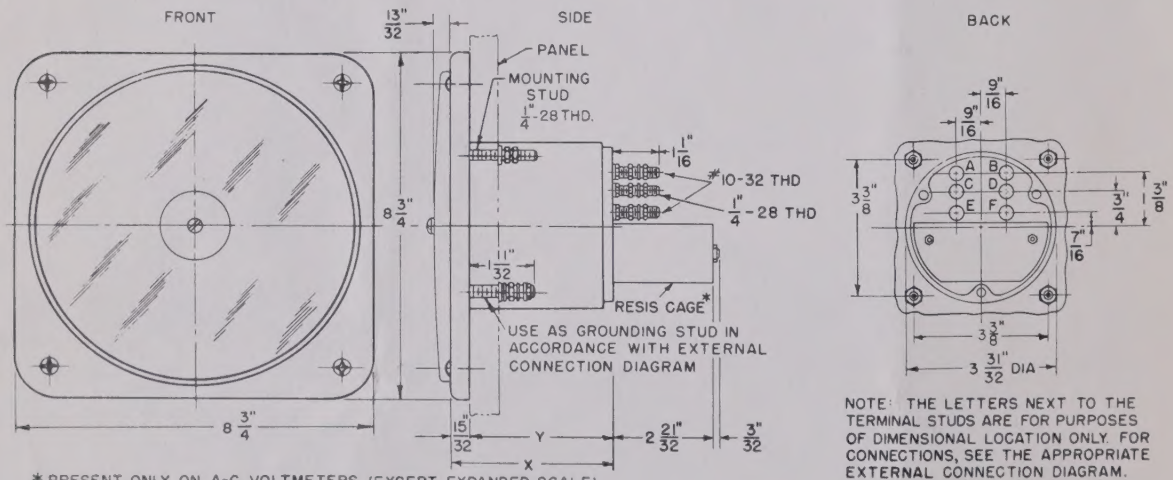
# TYPE AB-14, -16, -18, AND DB-14, -16, -18 AMMETERS AND VOLTMETERS

## INTRODUCTION

These instructions cover the installation of the General Electric instruments identified above. They are long-scale, rectangular-pattern, switchboard-type instruments designed for semi-flush mounting. The instruments, as supplied, are intended for use on the circuit specified by the customer.

There is a nameplate located on the back of each instrument. This nameplate gives a number and such information on the current or voltage rating, frequency rating, transformer ratio, full-scale value, and lead resistance as is applicable to the instrument. On voltmeters, the nameplate also indicates whether the resistor is internal or external.

Ammeters and voltmeters supplied with transformers will have their scales calibrated in primary amperes or primary volts respectively, unless otherwise specified.

### A-C AMMETERS

When the circuit exceeds 20 amperes, a current transformer of the ratio indicated on the nameplate must be used. When the circuit exceeds 650 volts a current transformer must be used for purposes of insulation. The current transformer must have a frequency rating which corresponds to that indicated on the instrument nameplate.

### A-C VOLTMETERS

When the circuit exceeds 750 volts, a potential transformer of the ratio indicated on the instrument nameplate must be used. The transformer must have a frequency rating which corresponds to that on the instrument nameplate.

An external Form-3 resistor must be used when so indicated on the instrument nameplate. The table gives the number of tubes in the resistor supplied with instruments of various voltage ratings. When an external resistor is used, it must bear the same number as that of the instrument. The dimensions of the external resistors are given in Fig. 4, 5, and 6.

**EXTERNAL RESISTORS**

| Description | Volts | External Resistor |
|---|---|---|
| Single-range | 0-150 | None |
| Single-range | 151-175 | One 1-tube |
| Single-range | 176-300 | One 2-tube |
| Single-range | 301-500 | One 3-tube in a 4-tube cage |
| Single-range | 501-700 | One 4-tube |
| Single-range | 701-750 | One 4-tube and One 1-tube |
| Double-range | 75/150 & 150/300 | One 1-tube |

### D-C AMMETERS

D-c ammeters designed for current measurement above 60 amperes necessitate the use of shunts which are to be connected to the ammeter by means of the leads provided (see WARNING below). In the event that leads are supplied by the purchaser, their resistance should agree with the value stamped on the instrument nameplate. Any change in the resistance of these leads will introduce an error in the reading. General Electric shunts of the same ampere rating and millivolt drop are interchangeable.

**Warning:** All shunts should be connected in the grounded side of the line when possible. When this is not possible, or the circuit cannot be grounded, avoid removing the cover since the instrument windings, as well as the scale and pointer, are at line potential. Use caution to avoid contacting this potential.

As the resistance of the shunt leads used in certain applications cannot be predetermined at the factory, it has been found desirable to furnish some d-c ammeters with an internal rheostat to adjust for nonstandard lead resistances.

The nameplate on the instrument has an INSTRUMENT + LEAD RESIS. value stamped upon it. This value is to be that of the total circuit, which is considered to include the resistance of the instrument and its leads with the shunt disconnected. This total circuit resistance must be adjusted correctly in order to attain the specified accuracy of the instrument.

To adjust the rheostat for a given lead resistance, proceed as follows:

If a resistance bridge is available, connect it across the shunt end of the leads (shunt disconnected) and the instrument across the opposite end. Set the resistance bridge for the INSTRUMENT + LEAD RESIS. value stamped on the instrument nameplate. Loosen the lock nut (located under the nameplate), and turn the rheostat shaft (which projects through the nameplate) until a zero deflection is secured on the bridge galvanometer. After the correct setting has been obtained, retighten the lock nut.

*These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.*

If a resistance bridge is not available, adjustment may be made by connecting a standard millivoltmeter across the shunt end of the leads (shunt disconnected) and the instrument across the opposite end. Apply a low adjustable d-c voltage across the shunt end of the leads and adjust this voltage until the indication on the standard millivoltmeter agrees with the fullscale millivolts (marked FULL SCALE MV) on the instrument nameplate. Loosen the lock nut (located under the nameplate), and turn the rheostat shaft (which projects through the nameplate) until the ammeter reads full scale. Retighten the lock nut.

**Note:** The maximum lead resistance is about 1 ohm for a 100-millivolt instrument and about 0.26 ohm for a 50-millivolt instrument.

**D-C VOLTMETERS**

D-c voltmeters designed for use on circuits above 750 volts and d-c ground detectors for voltages up to and including 750 volts are furnished with external resistors and are connected directly to the circuit to be measured.

## INSTALLATION

**MOUNTING**

Cut-out and panel-drilling dimensions are shown in Fig. 7. All drilling and all wiring on the switchboard should be completed before mounting the instruments. Supporting studs are provided for mounting on the switchboard. Mount the instruments in a level position.

These instruments are practically unaffected by stray fields, but it is advisable to keep transformers and wires carrying heavy current as far as possible from all indicating instruments.

When there is no current flowing through the instrument and it is properly leveled, the pointer should indicate zero. Any deviation from zero should be corrected by means of the zero adjustor.

**TERMINAL CONNECTIONS**

The threads on the terminal studs and nuts should be clean and bright. The contact surfaces of nuts, busbars, and cable terminals must be thoroughly clean to insure good contact. If a nut turns hard, it should be run over a tap of the proper dimensions; otherwise, the threads on the stud may be ruined or the stud turned in the instrument, thereby breaking the connection. After the instrument has been connected, tighten the nuts sufficiently to insure good contact. Do not overtighten.

The nuts and studs used in these instruments are U. S. standard.

Connect the instrument as shown in the appropriate diagram. The numbers in these connection diagrams correspond to the numbers stamped on the instrument terminals.

On instruments manufactured prior to 1951, the terminal studs are stamped with letters instead of numbers. For such instruments, the connection diagrams in this book may be followed by observing the pictorial positioning of the terminals, rather than the stud markings.

**Warning:** Care must be exercised in handling high tension wires when installing instruments on such circuits.

**GROUNDING CASES OF A-C INSTRUMENTS**

It is frequently desirable to use transformers on circuits of over 150 volts. The cases of instruments which are used with current and potential transformers should be connected to the grounded side of the secondary circuits of such transformers. No. 12 Awg copper wire is suitable for this purpose.

Grounding connections from the grounded side of the secondary circuits to earth should be made in accordance with the provisions of the National Electric Code.

## PRINCIPLES OF OPERATION

The d-c instruments utilize a permanent-magnet, moving-coil mechanism adapted for the longscale instrument design. Current passing through the moving coil produces a magnetic field which interacts with the field produced by the permanent magnet, thus supplying the deflecting torque. The moving system deflects until counterbalanced by the instrument control springs.

The a-c instruments (except expanded-scale voltmeters) employ a moving iron mechanism of the attraction-repulsion type. In these instruments, three soft-iron strips of carefully determined configuration are mounted inside the field coil.

When this coil is energized, it magnetizes the three iron strips and also a vane attached to the pivoted shaft. The center iron strip exerts a force of repulsion, and the other two strips a force of attraction, on the moving vane, in such a manner that the pointer moves upscale until the torque is counterbalanced by the instrument control spring.

The expanded-scale, a-c voltmeters utilize a standard electrodynamometer mechanism with a saturable reactor placed in series with the moving coil. The moving-coil circuit is connected in parallel with a circuit consisting of the field and frequency compensating network.

When the voltage source is applied across the saturable reactor, the exciting current varies in a nonlinear fashion with the voltage. The scale distribution corresponds to this nonlinear variation, and the instrument produces an accurate, readable indication in the area of the reference voltage.







NOTE: THE LETTERS NEXT TO THE TERMINAL STUDS ARE FOR PURPOSES OF DIMENSIONAL LOCATION ONLY. FOR CONNECTIONS, SEE THE APPROPRIATE EXTERNAL CONNECTION DIAGRAM.

* PRESENT ONLY ON A-C VOLTMETERS (EXCEPT EXPANDED SCALE) RATED 150 VOLTS OR BELOW

| INSTRUMENT | STUD LOCATION | DIMENSIONS (MODEL NO. ENDING IN "1") | | DIMENSIONS (MODEL NO. ENDING IN "2") | |
|---|---|---|---|---|---|
| | | X | Y | X | Y |
| D-c Ammeter | C,D | 3-11/32" | 2-31/32" | 4-1/4" | 3-7/8" |
| D-c Voltmeter | A,B | 3-11/32" | 2-31/32" | 4-1/4" | 3-7/8" |
| D-c Ground Detector | C,D | 3-11/32" | 2-31/32" | 4-1/4" | 3-7/8" |
| A-c Ammeter | A,B | 4-1/4" | 3-7/8" | 4-1/4" | 3-7/8" |
| A-c Ammeter (double-rated) | A,B,E,F | 4-1/4" | 3-7/8" | 4-1/4" | 3-7/8" |
| A-c Voltmeter | A,B | 4-1/4" | 3-7/8" | 4-1/4" | 3-7/8" |
| A-c Voltmeter (expanded-scale) | A,B | 5-11/16" | 5-5/16" | 5-11/16" | 5-5/16" |

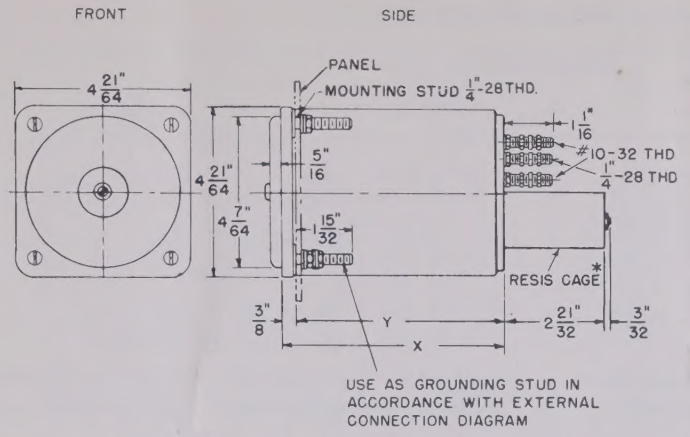*Fig. 3. Dimensions of Types AB-18 and DB-18 ammeters, voltmeters, and ground detectors*




*Fig. 4. Single-tube, Form-3 resistor*




*Fig. 5. Two-tube, Form-3 resistor*

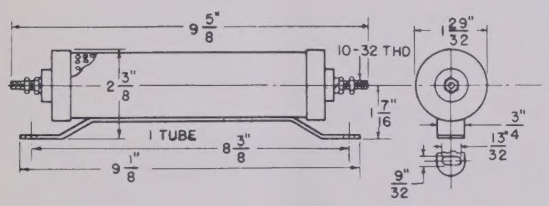


*Fig. 6. Four-tube, Form-3 resistor*

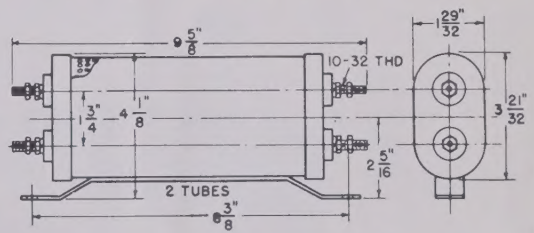


*Fig. 7. Cut-out and panel-drilling dimensions*

## CONNECTION DIAGRAMS

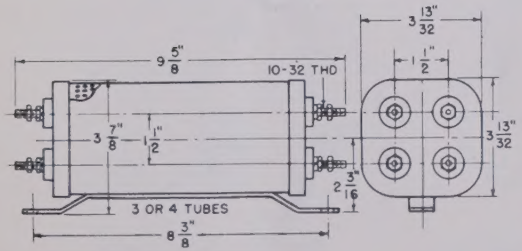(Back Views)

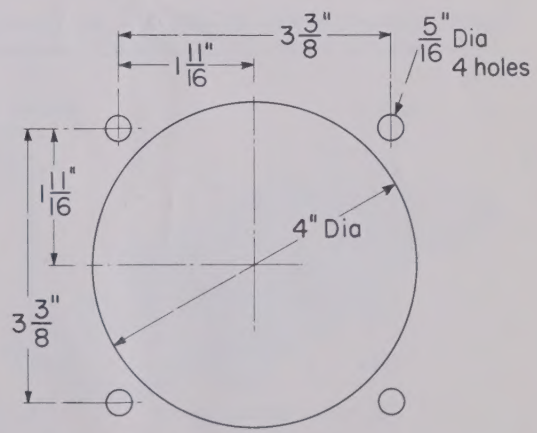


*Fig. 8. Self-contained d-c ammeter*




*Fig. 9. D-c ammeter with external shunt*




*Fig. 10. Low range on double-rated d-c ammeter*




*Fig. 11. High range on double-rated d-c ammeter*




*Fig. 12. Self-contained d-c voltmeter*




*Fig. 13. D-c voltmeter rated above 750 volts (with external resistor)*




*Fig. 14. Double-rated d-c voltmeter (illustrating use of switch to select range)*




*Fig. 15. D-c ground detector for voltages up to and including 750 volts (with external resistor)*

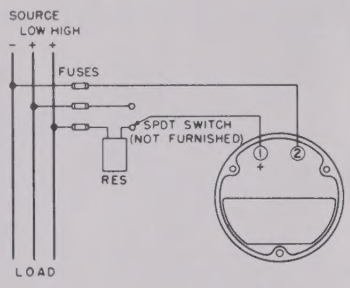


*Fig. 16. Self-contained a-c ammeter*




*Fig. 17. A-c ammeter with current transformer*




*Fig. 18. Low range on double-rated a-c ammeter*




*Fig. 19. High range on double-rated a-c ammeter*




*Fig. 20. Self-contained a-c voltmeter*




*Fig. 21. A-c voltmeter rated above 150 volts (with external resistor)*




*Fig. 22. A-c voltmeter with potential transformer*

## FORM-15, 50-MILLIVOLT SHUNTS

| Amp | DIMENSIONS IN INCHES | | | | | | | | | | | | Connection Strips Each End |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Fig. No. 23 | A | B | C | D | E | F | G | H | J | K | L | |
| 75 | a | 6 1/4 | 1 1/8 | 5 1/4 | 3 11/16 | 1/2 | 1/2 | 1 9/32 | 13/32 | 1/4 | 1/8 | 1/8 | 1 |
| 80 | a | 6 1/4 | 1 1/4 | 5 1/4 | 3 11/16 | 1/2 | 1/2 | 1 9/32 | 13/32 | 1/4 | 1/8 | 1/8 | 1 |
| 100 | a | 6 1/4 | 1 1/2 | 5 1/4 | 3 11/16 | 1/2 | 1/2 | 1 9/32 | 13/32 | 1/4 | 1/8 | 1/8 | 1 |
| 150 | a | 6 3/4 | 1 1/2 | 5 1/4 | 3 11/16 | 11/16 | 3/4 | 1 17/32 | 17/32 | 1/4 | 7/32 | 7/32 | 1 |
| 200 | a | 6 3/4 | 1 1/2 | 5 1/4 | 3 11/16 | 7/8 | 3/4 | 1 17/32 | 17/32 | 1/4 | 5/16 | 5/16 | 1 |
| 250 | a | 6 3/4 | 1 1/2 | 5 1/4 | 3 11/16 | 1 1/16 | 3/4 | 1 17/32 | 17/32 | 1/4 | 13/32 | 13/32 | 1 |
| 300 | a | 6 3/4 | 1 1/2 | 5 1/4 | 3 11/16 | 1 1/4 | 3/4 | 1 17/32 | 17/32 | 1/4 | 1/2 | 1/2 | 1 |
| 400 | a | 8 1/4 | 1 1/2 | 6 1/4 | 3 7/8 | 1 5/8 | 1 | 2 5/16 | 17/32 | 3/8 | 5/8 | 5/8 | 1 |
| 500 | a | 8 1/4 | 1 7/8 | 6 1/4 | 3 7/8 | 1 5/8 | 1 | 2 5/16 | 17/32 | 3/8 | 5/8 | 5/8 | 1 |
| 600 | a | 8 1/4 | 2 | 6 1/4 | 3 7/8 | 1 11/16 | 1 | 2 5/16 | 21/32 | 3/8 | 23/32 | 23/32 | 1 |
| 800 | a | 8 1/4 | 2 3/8 | 6 1/4 | 3 7/8 | 2 | 1 | 2 5/16 | 21/32 | 3/8 | 13/16 | 13/16 | 1 |
| 1000 | b | 9 3/4 | 3 | 7 3/4 | 4 3/4 | 1 11/16 | .... | 2 1/2 | 21/32 | 15/32 | .... | .... | 2 |
| 1200 | b | 10 | 3 | 8 | 5 | 2 5/16 | 1 3/4 | 2 1/2 | 17/32 | 25/32 | .... | .... | 2 |
| 1500 | b | 10 | 3 | 8 | 5 | 2 5/16 | 1 3/4 | 2 1/2 | 17/32 | 17/32 | .... | .... | 3 |
| 2000 | b | 10 1/2 | 4 | 8 1/2 | 5 1/2 | 2 15/32 | 2 1/2 | 2 1/2 | 21/32 | 39/64 | .... | .... | 3 |
| 2500 | b | 10 1/2 | 4 | 8 1/2 | 5 1/2 | 2 15/16 | 2 1/2 | 2 1/2 | 21/32 | 19/32 | .... | .... | 4 |
| 3000 | b | 11 1/4 | 4 | 9 1/4 | 6 1/4 | 3 9/16 | 2 1/2 | 2 1/2 | 21/32 | 29/32 | .... | .... | 4 |
| 4000 | c | 11 1/2 | 4 | 9 1/2 | 6 1/2 | 7 | 4 21/32 | 2 5/8 | 2 1/2 | .... | .... | .... | 5 |
| 5000 | c | 11 3/4 | 5 | 9 3/4 | 6 3/4 | 7 1/2 | 4 1/2 | 2 5/8 | 2 1/2 | .... | .... | .... | 5 |
| 6000 | c | 13 3/4 | 6 | 11 3/4 | 8 3/4 | 8 | 4 21/32 | 2 7/8 | 3 | .... | .... | .... | 5 |
| 8000 | c | 15 3/4 | 6 | 13 3/4 | 10 3/4 | 9 1/2 | 6 7/32 | 3 1/8 | 3 | .... | .... | .... | 7 |
| 10000 | c | 17 3/4 | 8 | 15 3/4 | 12 3/4 | 10 1/2 | 5 3/4 | 3 5/8 | .... | .... | .... | .... | 7 |

For current values above 10,000 amp, the best arrangement is to use two or more shunts in parallel with a separate set of leads for each shunt.

The Form-15 shunts for 800 amp and below have single-leaf terminals; above 800 amp, multileaf terminals are provided.




(a) 75- to 800-amp shunts




(b) 1,000- to 3,000-amp shunts

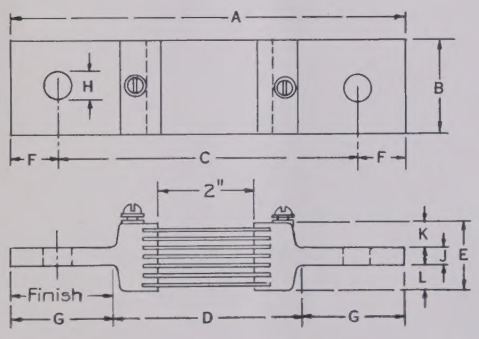


(c) 4,000- to 10,000-amp shunts

*Fig. 23. Dimensions of Form-15 shunts, 75 to 10,000 amperes, 50-millivolt drop.*

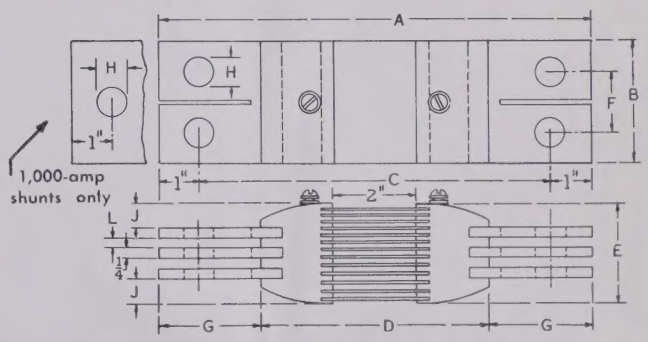

*Fig. 24. Form-15 shunts, 75 to 800 amperes*

# GENERAL ELECTRIC APPARATUS SALES OFFICES

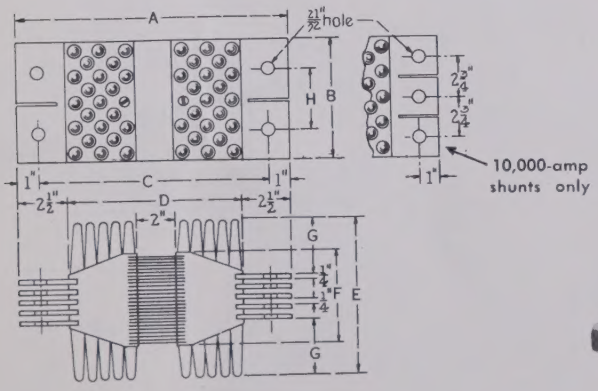**Ready to Assist You with Your Problems**

Abilene, Texas . . . . . 442 Cedar St.
Akron 13, Ohio . . . . . P.O. Box 5278
665 West Market St.
Albany 3, N. Y. . . . . 8 Colvin Ave.
Albuquerque, N. Mex. . . . . 323 Third St., S.W.
Alexandria, La. . . . . 720 Murray St.
Allentown, Pa. . . . . 1132 Hamilton St.
Amarillo, Texas . . . . . Amarillo Bldg.
Appleton, Wisc. . . . . 510 W. College Ave.
Atlanta 2, Ga. . . . . P.O. Box 4659
1860 Peachtree Rd., N.W.
Augusta, Me. . . . . 152 State St.
Baltimore 1, Md. . . . . 111 Park Ave.
Bangor, Me. . . . . P.O. Box 778, 77 Central St.
Baton Rouge 6, La. . . . . 3170 Florida Blvd.
Battle Creek, Mich. . 607 Security Nat'l Bank Bldg.
Beaumont, Texas . . . . . P.O. Box 2870
1385 Calder Ave.
Billings, Mont. . . . . Rm. 816, 303 No. Broadway
Binghamton, N. Y. . . . . P.O. Box 931
19 Chenango St.
Birmingham 2, Ala. . . . . P.O. Box 2602
1804 Seventh Ave., N.
Bismarck, N. Dak. . . . . 418 Rosser Ave.
Bluefield, W. Va. . . . . P.O. Box 980
704 Bland St., Appalachian Bldg.
Boise, Idaho . . . . . 1524 Idaho St.
Boston 1, Mass. . . . . 140 Federal St.
Buffalo 2, N. Y. . . . . 625 Delaware Ave.
Butte, Mont. . P.O. Box 836, 103 N. Wyoming St.
Canton 4, Ohio . . . . . 1226 Market Ave., N.
Cedar Rapids, Iowa . . . . . 210 Second St., S.E.
Charleston 28, W. Va. . . . . P.O. Box 2313
306 MacCorkle Ave., S.E.
Charlotte 1, N. C. . . . . P.O. Box 1285
112 S. Tryon St.
Chattanooga 2, Tenn. . . . . 832 Georgia Ave.
Chicago 80, Ill. . . . . 840 S. Canal St.
Cincinnati 6, Ohio . . . . . 2621 Victory Pkwy.
Cleveland 4, Ohio . . . . . 4966 Woodland Ave.
Columbia 1, S. C. . . P.O. Box 1434, 1226 Bull St.
Columbus 15, Ohio . . . . . 40 S. Third St.
Corpus Christi, Texas . . . . . 205 N. Chaparral
Dallas 2, Texas . . . . . 1801 N. Lamar St.
Davenport-Bettendorf, Iowa . . . . . P.O. Box 630
1039 State St.
Dayton 2, Ohio . . . . . 11 W. Monument Bldg.
Dayton 19, Ohio, Avia. & Def. . 2600 Far Hills Ave.
Denver 1, Colo. . . . . P.O. Box 2331
650 Seventeenth St.
Des Moines 12, Iowa . . . . . 2116 W. Grand Ave.
Detroit 2, Mich. . . . . 700 Antoinette St.
Duluth 2, Minn. . . . . 14 W. Superior St.
El Paso, Texas . . . . . 215 No. Stanton
Erie 2, Pa. . . . . 1001 State St.
Eugene, Ore. . . . . P.O. Box 352, 1170 Pearl St.
Evansville 5, Ind. . . . . P.O. Box 157
312 N.W. Seventh St.
Fairmont, W. Va. . . . . P.O. Box 1626
310 Jacobs Bldg.
Fergus Falls, Minn. . . . . P.O. Box 197
108 N. Court Ave.
Flint 2, Mich. . . . . 653 S. Saginaw St.
Fort Wayne 6, Ind. . . . . 3606 So. Calhoun St.
Fort Worth 2, Tex. . . . . 408 W. Seventh St.
Fort Worth, Tex. . . P.O. Box 9218, Avia. & Def.,
6100 Camp Bowie Blvd.
Fresno 1, Calif. . . . . 407 Patterson Bldg.
Tulare and Fulton St.
Garden City, L. I., N. Y. . . . . Avia. & Def.,
Franklin Nat'l Bank Bldg., 600 Old Country Rd.
Grand Rapids 2, Mich. . . . . 425 Cherry St., S.E.
Greensboro, N. C. . . . . P.O. Box 1162
301 S. Elm St.
Greenville, S. C. . . . . P.O. Box 1408
108 W. Washington St.
Gulfport, Miss. . . . . 207 Jo-Fran Bldg.
Hagerstown, Md. . . . . P.O. Box 477
Professional Arts Bldg.
Hartford 5, Conn. . . . . 764 Asylum Ave.
Houston 1, Texas . . . . . 1312 Live Oak St.
Indianapolis 8, Ind. . . . . 3750 N. Meridian St.
Jackson, Mich. . . . . 120 W. Michigan Ave.
Jackson 1, Miss. . . . . 203 W. Capitol St.
Jacksonville 2, Fla. . . . . Station G—Box 48
700 E. Union St.
Johnstown, Pa. . . . . 841 Oak St.
Joplin, Mo. . . . . P.O. Box 948
220½ W. Fourth St.
Kalamazoo, Michigan . . . . . P.O. Box 447
927 South Burdick St.
Kansas City 5, Mo . . . . . 106 W. Fourteenth St.
Knoxville 16, Tenn. . . . . 1301 Hannah Ave., N.W.
Lake Charles, La. . . . . P.O. Box 5212
422 Seventh St.
Lansing 8, Mich. . . 814 Michigan National Tower
Lexington, Ky. . . . . 402 First National Bank Bldg.
Lincoln 8, Nebr. . . . Sharpe Bldg., 206 S. 13th St.
Little Rock, Ark. . . . . 103 W. Capitol Ave.
Los Angeles 54, Calif. . . . . 212 N. Vignes St.
Los Angeles 5, Calif. . . . . Avia. & Def.,
3325 Wilshire Blvd.
Louisville 2, Ky. . . . . 455 S. Fourth St.
Lubbock, Texas . . . . . P.O. Box 1464
3302 Avenue "A"
Macon, Ga. . . . . P.O. Box 1506, 682 Cherry St.
Manchester, N. H. . . . . 1662 Elm St.
Medford, Ore. . . P.O. Box 1349, 107 E. Main St.
Memphis 3, Tenn. . . . . 8 N. Third St.
Miami 32, Fla. . . . . 25 S.E. Second Ave.
Midwest City, Okla. . . . . P.O. Box 5867
Avia. & Def., 207 Post Office Bldg.
Milwaukee 3, Wisc. . . . . 940 W. St. Paul Ave.
Minneapolis 3, Minn. . . . . 12 S. Sixth St.
Mobile, Ala. . . . . 704 Government St.
Nashville 3, Tenn. . . . . 1717 W. End Building
Newark 2, N. J. . . . . 520 Broad St.
New Haven 6, Conn. . . . . 129 Church St.
New Orleans 12, La. . . . . 837 Gravier St.
Newport News, Va. . P.O. Box 238, Warwick Sta.
311 Main St.
New York 22, N. Y. . . . . 570 Lexington Ave.
Niagara Falls, N. Y. . . . P.O. Box 715, 44 Fall St.
Oakland 12, Calif. . . . . 409 Thirteenth St.
Oak Ridge, Tenn. . . . . 253 Main St., E.
Oklahoma City 2, Okla. . . . . 119 N. Robinson St.
Omaha 2, Nebr. . . . . 409 S. Seventeenth St.
Pasco, Wash. . . P.O. Box 971, 824 W. Lewis St.
Peoria 2, Ill. . . . . 309 Jefferson Bldg.
Philadelphia 2, Pa. . . . . 3 Penn Center Plaza
Phoenix, Ariz. . . P.O. Box 4037, 220 Luhrs Tower
Pittsburgh 22, Pa. . . The Oliver Bldg., Mellon Sq.
Portland 7, Ore. . . . . P.O. Box 909
2929 N.W. 29th Ave.
Providence 3, R. I. . . Industrial Nat'l Bank Bldg.
Raleigh, N. C. . . P.O. Box 2507, 16 W. Martin St.
Reading, Pa. . . . . 31 N. Sixth St.
Richmond 17, Va. . . . . P.O. Box 2188
700 E. Franklin St.
Riverside, Calif. . . . . 3570 Ninth St.
Roanoke 5, Va. . . . . P.O. Box 871
920 S. Jefferson St.
Rochester 4, N. Y. . . . . 89 E. Ave.
Rockford, Ill. . . . . 110 S. First St.
Rutland, Vt. . . . . 38½ Center St.
Sacramento 14, Calif. . . . . 626 Forum Bldg.
Saginaw, Mich. . . . . Second National Bank Bldg.
St. Louis 1, Mo. . . . . 818 Olive St.
Salt Lake City 10, Utah . . . . . P.O. Box 779
200 S. Main St.
San Antonio 5, Texas . . . . . 434 So. Main Ave.
San Bernardino—Rialto, Calif. . . . . P.O. Box 387
337 N. Riverside Ave.
San Diego 1, Calif. . . . . P.O. Box 1222
1240 Seventh Ave.
San Francisco 6, Calif. . . . . 235 Montgomery St.
Savannah, Ga. . . . . 40 East Bay St.
Seattle 11, Wash. . . . . P.O. Box 1858
710 Second Ave.
Seattle 8, Wash. . . Avia. & Def., 220 Dawson St.
Shreveport, La. . . . . 206 Beck Bldg.
Sioux City 13, Iowa . . 572 Orpheum Electric Bldg.
South Bend 1, Ind. . . . . 112 W. Jefferson Blvd.
Spokane 4, Wash. . . . . S. 162 Post St.
Springfield, Ill. . . . . 607 E. Adams St.
Springfield 3, Mass. . . . . 1387 Main St.
Stockton, Calif. . . . . 2525 Pacific Ave.
Syracuse 1, N. Y. . . P.O. Box 1021, 3532 James St.
Tacoma 1, Wash. . . . . P.O. Box 1485
1216 Washington Bldg.
Tampa 1, Fla. . . P.O. Box 3092, 1206 North A St.
Toledo 4, Ohio . . . . . 420 Madison Ave.
Trenton 8, N. J. . . . . 214 E. Hanover St.
Tucson, Ariz. . . . P.O. Box 710, 650 N. Sixth Ave.
Tulsa 3, Okla. . . . . 320 S. Boston Ave.
Utica 2, N. Y. . . . . 258 Genesee St.
Washington 5, D. C. . . . . 777—14th St., N.W.
Waterloo, Iowa . . . . . 206 W. 4th St.
Wenatchee, Wash. . . . . P.O. Box 676
328 N. Wenatchee Ave.
Wheeling, W. Va. . . . . 40 Fourteenth St.
Wichita 2, Kan. . . . . 200 E. First St.
Williamston, N. C., P.O. Box 748, 115 E. Main St.
Worcester 5, Mass. . . . . 288 Grove St.
York, Pa. . . . . 56 N. Harrison St.
Youngstown 7, Ohio . . . . . 272 E. Indianola Ave.

**Hawaii: American Factors, Ltd., P.O. Box 3230, Honolulu 1**

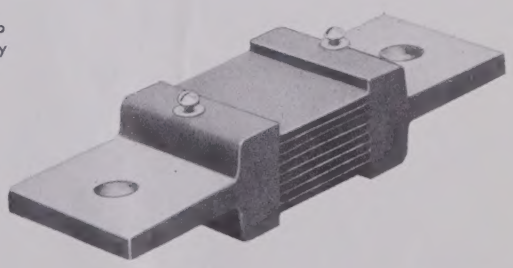**Canada: Canadian General Electric Company, Ltd., Toronto**

# GENERAL ELECTRIC SERVICE SHOPS

**WHEN YOU NEED SERVICE . . . These G-E service shops will repair, recondition, and rebuild your electric apparatus. The facilities are available day and night, seven days a week, for work in the shops or on your premises. Latest factory methods and genuine G-E renewal parts are used to maintain peak performance of your equipment. For full information about these services, contact your nearest service shop or sales office.**

* Denotes Aircraft Service Shops

Albany, N. Y. . . . . 1097 Central Ave.
Allentown, Pa. . . . . 668 E. Highland St.
Appleton, Wisc. . . . . Midway Industrial Area,
P.O. Box 83
Atlanta—Chamblee, Ga. . . . . 5035 Peachtree
Indus. Blvd.
*Arkansas City, Kan. . . . . P.O. Box 526
Baltimore 30, Md. . . . . 920 E. Fort Ave.
Boston—Medford 55, Mass. . . . . 3960 Mystic
Valley Pkwy.
Buffalo 11, N. Y. . . . . 318 Urban St.
Charleston 28, W. Va. . . 306 MacCorkle Ave., S.E.
Charlotte, N. C. . . . . 2328 Thrift Rd.
Chicago 32, Ill. . . . . 4360 W. 47th St.
Cincinnati 2, Ohio . . . . . 444 W. Third St.
*Cincinnati 3, Ohio . . . . . 956 E. Court St.
Cleveland 4, Ohio . . . . . 4966 Woodland Ave.
Columbus 23, Ohio . . . . . 2128 Eakin Rd.
Corpus Christi, Texas . . . . . 115 Busse St.
Dallas, Texas . . . . . 3202 Manor Way
Denver, Colo. . . . . 3353 Larimer St.
Detroit 2, Mich. . . . . 5950 Third Ave.
Ft. Wayne, Ind. . . . . 606 W. Superior St.
Hialeah, Fla. . . . . 1062 E. 28th St.
Houston 20, Texas . . . . 5534 Harvey Wilson Dr.
Indianapolis 22, Ind. . . . . 1740 W. Vermont St.
Johnstown, Pa. . . . . 841 Oak St.
Kansas City 20, Mo. . . . . 3525 Gardner Ave.
Los Angeles 1, Calif. . . . . 6900 Stanford Ave.
Louisville, Ky. . . . . 3900 Critten Dr.
Midland, Tex. . . . . 3404 Bankhead Hwy.
Milwaukee 3, Wisc. . . . . 940 W. St. Paul Ave.
Minneapolis 12, Minn. . . . . 2025 49th Ave., N.
New Orleans, La. . . . . 2815 N. Robertson St.
New York—N. Bergen, N. J. . 6001 Tonnelle Ave.
Oakland, Calif. . . . . 1525 Peralta St.
*Ontario, Calif. . . . . Ont. Int'l Airport
Philadelphia 24, Pa. . . . . 1040 E. Erie Ave.
Pittsburgh 6, Pa. . . . . 6519 Penn Ave.
Plantsville, Conn. . . . . 370 Atwater St.
Portland 1[illegible]
Richmond 2[illegible]
Roanoke 7[illegible]
Sacrament[illegible]
St. Louis 1[illegible]
Salt Lake [illegible]
San Franci[illegible]
Seattle 4,[illegible]
*Seattle 4[illegible]
Spokane 3[illegible]
Tampa 1,[illegible]
Toledo 4, Ohio . . . . . [illegible]
York, Pa. . . . . 54 N. Harrison St.
Youngstown 7, Ohio . . . . . 272 E. Indianola Ave.

MP MASTER
MA32588

**INSTRUMENT DEPARTMENT, GENERAL ELECTRIC COMPANY, WEST LYNN, MASS.** ⑥

4-59 (25M)
PRINTED IN U.S.A.